


SPECIFICATIONS:

- INPUT: 0 TO 5A @ 45 TO 65HZ, .5VA.
(10A CONTINUOUS OVERLOAD, 250A FOR 1 SEC.).
- INDICATION: 0 TO 200/1999 (ADJUSTABLE).
- ACCURACY: ±.20%, ±1 DIGIT. RMS SENSING.
- DISPLAY: .6" LED, RED.
- CONVERSION RATE: 1/SEC.
- CALIBRATION/DECIMAL/POINTS: REMOVE FRONT PANEL.
- OUTPUT OPTIONS:
 - 25-075-101: 0 TO ±1mADC INTO 0 TO 10K LOAD.
 - 25-075-1420: 4 TO 20mADC INTO 0 TO 500 OHM LOAD.
 - 25-075-J3.0: RS485 WITH DNP 3.0/ MODBUS PROTOCOL(0 TO 2000).
- AUX POWER OPTIONS:
 - 25-075: HAS 120VAC/125VDC ±10% POWER.
 - 25-075-24: HAS 24VAC/DC
 - 25-075-48: HAS 48VAC/DC
 - 25-075-250: HAS 250VAC/DC
- EXTRA ZERO OPTION: 25-075X-* HAS RIGHT HAND ZERO.

10. CONNECTIONS:

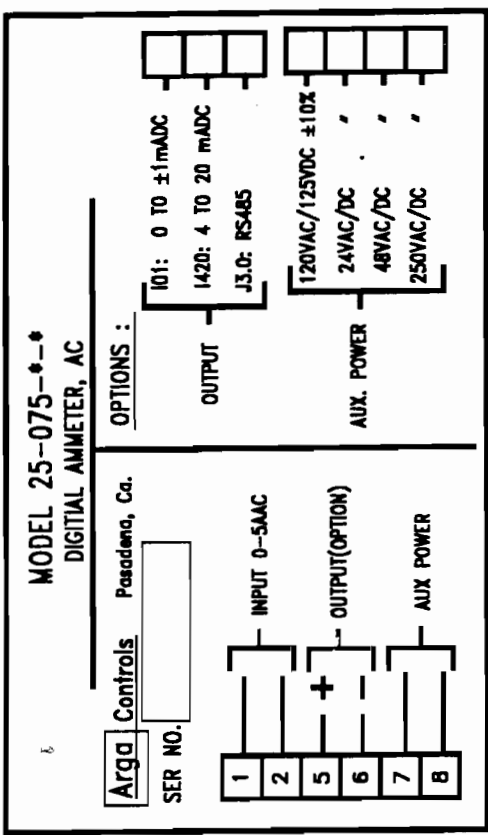

Arga Controls
Pasadena, California 91105

DIGITAL AMMETER, AC

SIZE	DWG NO.	REV.	C
A	25-075-**-*	DATE:	7 JULY 03
DATE: 26 FEB 88 HG		SHEET 1 OF 1	