

Don't leave your mission critical switching applications to chance!

With Electroswitch
Series 24 Switches, there's

NEVER A DOUBT!

- 65+ years serving military and power switching applications
- Millions of switches currently in service and daily operation
- Designed to meet C37.98 Class 1E nuclear seismic requirements
- Designed to meet C37.90 10,000 operations and also tested at rated load
- Engineering technical support with over 150 years of switch design and application experience
- ISO 9000 Certified quality programs
- *Designed, Engineered, and Made In the USA*




Lighted Nameplate:

- Integral LEDs for 180° viewing
- Trip coil monitoring
- SCADA contact feature

**Designed and built for
mission-critical utility applications**

- Proprietary precious metal alloy contacts
- Durable knife-type, double-wiping, self-cleaning contacts provide bounce-proof operation and *high shock* resistance
- 10 milliohm contact resistance (under rated load) for the life of the switch
- *Exceeds low milliamp contact communication requirements of utility relay systems*

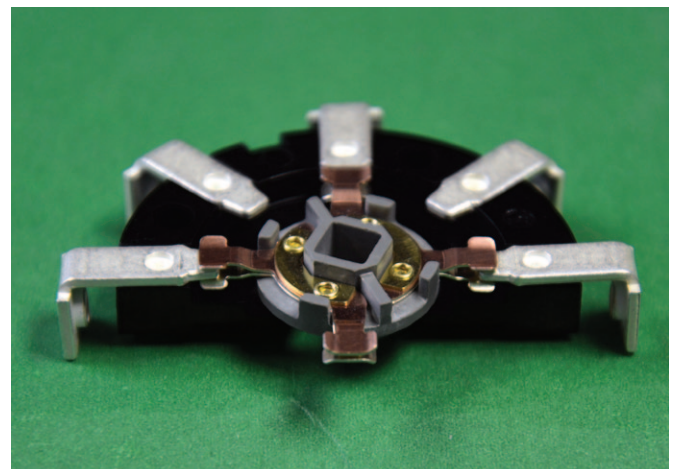

Loaded with field-proven features!

Lock-Out Relay	Breaker-Control	Selector Switch
Up to 24 N/C and 24 N/O contacts	Up to 20 poles	Up to 60 poles (contact factory for additional poles)
Fastest trip speed: Less than 8 milliseconds	Green/red open/close mechanical target	Configurations designed to meet your requirements
Orange mechanical position target (standard)	Field-adjustable position limits	Remote operated: 2-, 3-, or 8-position (low-level control)
9 trip coil configurations available to meet your requirements	Slip contact feature	Push-to-turn safety feature
Manual reset	Pull-to-lock safety feature	Key lock options
Electrical reset (low-level or serial control)	Key lock options	Solenoid lock feature
Self reset (low-level or serial control)	Remote operation available (low-level or serial control)	Keyed removable handle (synchroscope)
Less than 10.5" depth behind panel (for 12-deck manual model)	Bright LED indicators (up to 3) for monitoring trip coil integrity and voltage loss	Drip-proof option
Bright LED indicators (up to 3) for monitoring trip coil integrity and voltage loss	Single- or dual-trip coils	Bright LED indicators (up to 3)
Safety-related Class 1E (up to 10 decks)	Safety-related Class 1E (up to 10 decks)	Safety-related Class 1E (up to 10 decks)
Color handles available: black (standard), red, orange, yellow, green, white, blue, and gray	Color handles available: black (standard), red, orange, yellow, green, blue, and gray	UL/CSA/CE/Class 1E
UL/CSA/CE/Class 1E	UL/CSA/CE/Class 1E	